

LED

2  
PIECE  
DISH



Class D16


## EV-LED FIRE-SLA

CODE NUMBER: 1103

- Simple to install with quick mounting spring clips and a 'snap-in' molex connection between the two piece luminaire and the compact inverter
- 85/140mm two piece twist lock luminaire
- Economical reliable solution
- Non-maintained operation
- Unobtrusive and aesthetic design
- Flex and Plug
- Tested to comply with Australian Standard AS/NZS 2293
- Photometric Classification C0:D16, C90:D16

# LED FIRE EMERGENCY LUMINAIRE

## ONE BOX SOLUTION HAS EVOLVED

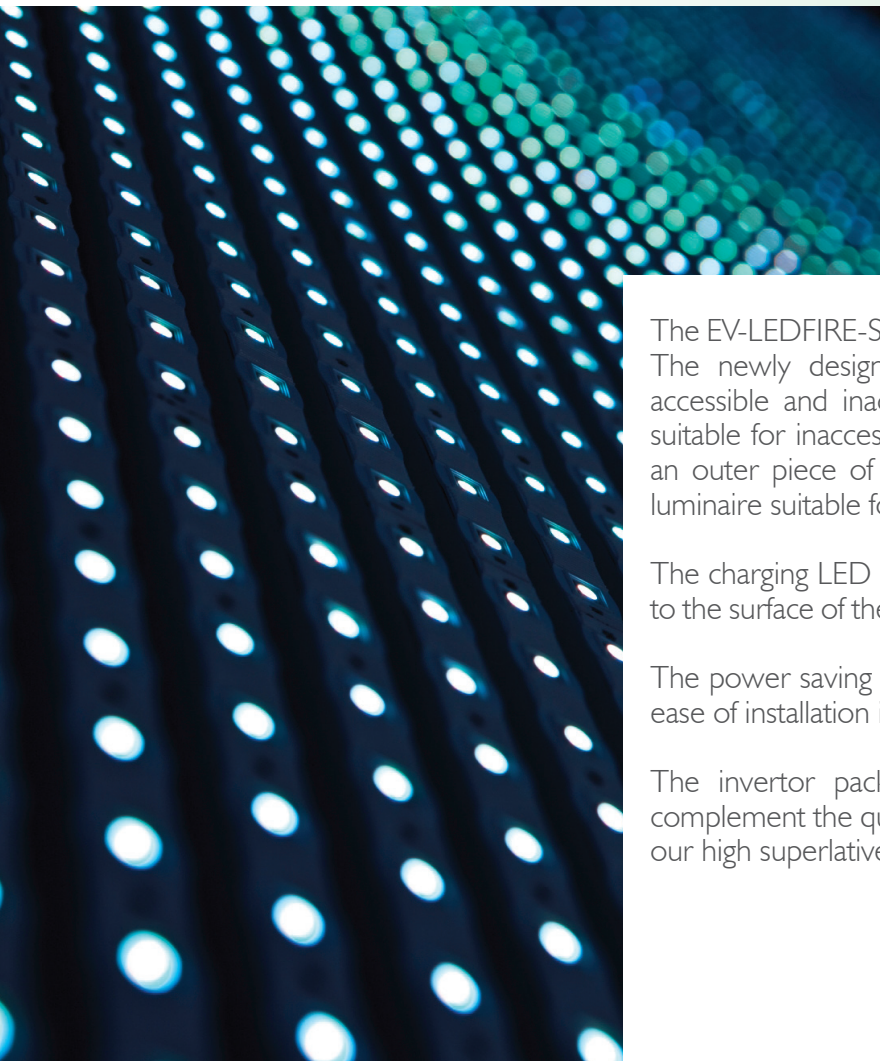

The EV-LED FIRE-SLA is supplied complete for all installation scenarios. The newly designed two piece luminaire allows installation into accessible and inaccessible ceiling forms. The 140mm luminaire is suitable for inaccessible ceilings with the option to twist and remove an outer piece of the luminaire transforming it into an 85mm size luminaire suitable for accessible ceilings.

The charging LED and low profile test switch has been designed flush to the surface of the fitting providing an aesthetically pleasing luminaire.

The power saving inverter pack is of a very compact design ensuring ease of installation into height restricted ceiling cavities.

The inverter pack is supplied complete with flex and plug. To complement the quality luminaire and inverter pack we have included our high superlative Sealed Lead Acid battery.

## Ordering Information

Model	Description	Product Number	Outer Carton Quantity
1103	Ledfire LED Lite	9336462011034	4

## Operational Information

General		Battery	
Operational Voltage (V)	220-240V	Battery Type	High Temperature Nickle Metal Hydride
Operational Frequency (Hz)	50/60	Battery Code	1925
Power Consumption	1.6W	Battery Capacity	850mAH
Operating Frequency	>40khz	Battery Voltage	4.8V
Viewing Distance	N/ A	Discharge Rating	2 Hours
Max. Ambient Temperature	40°C	Charger	
Photometric Classification	C0:D16 C90:D16	Charger Type	Trickle
Wiring	2 Pin Flex and Plug	Normal charge current	0mA
Mounting Type	Recessed Mounting	Trickle charge current	43mA
Replacement Lamp	LED	Charging Time	16 Hours
Lamp Re-Order Code	1927	Charger Operation	Continuous

## Construction and Dimensions

Body	Gear Tray	Diffuser	Lens	Cut Out	Weight	Length	Heights	Width	Fixing Centres
ABS Plastic Body	N/ A	High Temperature PBT	N/ A	70-120mm	0.900Kg	235mm	35mm	40mm	220mm

Spacing Table

Mounting Height	2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15	20
D16	12.1	12.6	13.0	13.3	13.6	13.9	14.1	14.6	14.6	14.6	14.4	13.8	12.9	11.5	N/ A	N/ A

## Accessories and Spare Parts

Model	Description	Model	Description
1925	Replacement battery for Ledfire LED Lite	1927	Replacement dish/ Lamp for LED Ledfire