

CONNECT REFRIGERANT LINES IN SECONDS




UL CERTIFIED

Approved for major refrigerants, including A2L refrigerants

DURABLE

Heavy duty, corrosion and UV resistant brass body

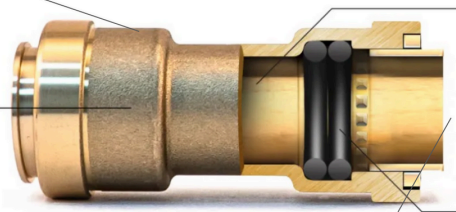

LEAK-RESISTANT

Prevents connection leaks caused by galling, vibration, pulsation and extreme temperature changes

PATENTED DESIGN

Double O-ring and grip ring seal ensures leak-proof connections

REMOVABLE

Quickly and easily disconnects with release tool

Approved Refrigerants

R22, R32, R134a, R290, R404a, R407a, R407c, R410a, R500, R600a

A2L Class: R452B, R454B



Socket



Coupler



Coupler Reducer



90 Degree Elbow

Part Number	Product Description	Box Quantity
HV-SC-0250	1/4" HVAC Push to Connect Coupling	10
HV-SC-0375	3/8" HVAC Push to Connect Coupling	10
HV-SC-0500	1/2" HVAC Push to Connect Coupling	10
HV-SC-0625	5/8" HVAC Push to Connect Coupling	10
HV-FA-0250	1/4" HVAC Push to Connect Socket	10
HV-FA-0375	3/8" HVAC Push to Connect Socket	10
HV-FA-0500	1/2" HVAC Push to Connect Socket	10
HV-FA-0625	5/8" HVAC Push to Connect Socket	10
HV-CR-375250	3/8" X 1/4" HVAC Push to Connect Coupling Reducer	10
HV-CR-500375	1/2" X 3/8" HVAC Push to Connect Coupling Reducer	10
HV-SE-0250	1/4" HVAC Push to Connect 90 Degree Elbow	10
HV-SE-0375	3/8" HVAC Push to Connect 90 Degree Elbow	10
HV-SE-0500	1/2" HVAC Push to Connect 90 Degree Elbow	10
HV-RTMT2562K	1/4"-5/8" Set of 4 removal tools - 1 of each size	10



Remove Tool

Approved Applications

- Residential and commercial use
- Copper and coated aluminum line sets
- Mini-split HVAC units

Maximum Rated Pressure

- 870 psi / 60 bar

