





OUTLINE DIMENSION DRAWING  
INVENSYS APPLIANCE CONTROLS  
NEW ZEALAND LIMITED

Date: 25 May 2001 Code: EFG 201 EA  
Compiled: J. Richardson  
Checked:  
C/A: Sheet 1 of 2  
Issue: E

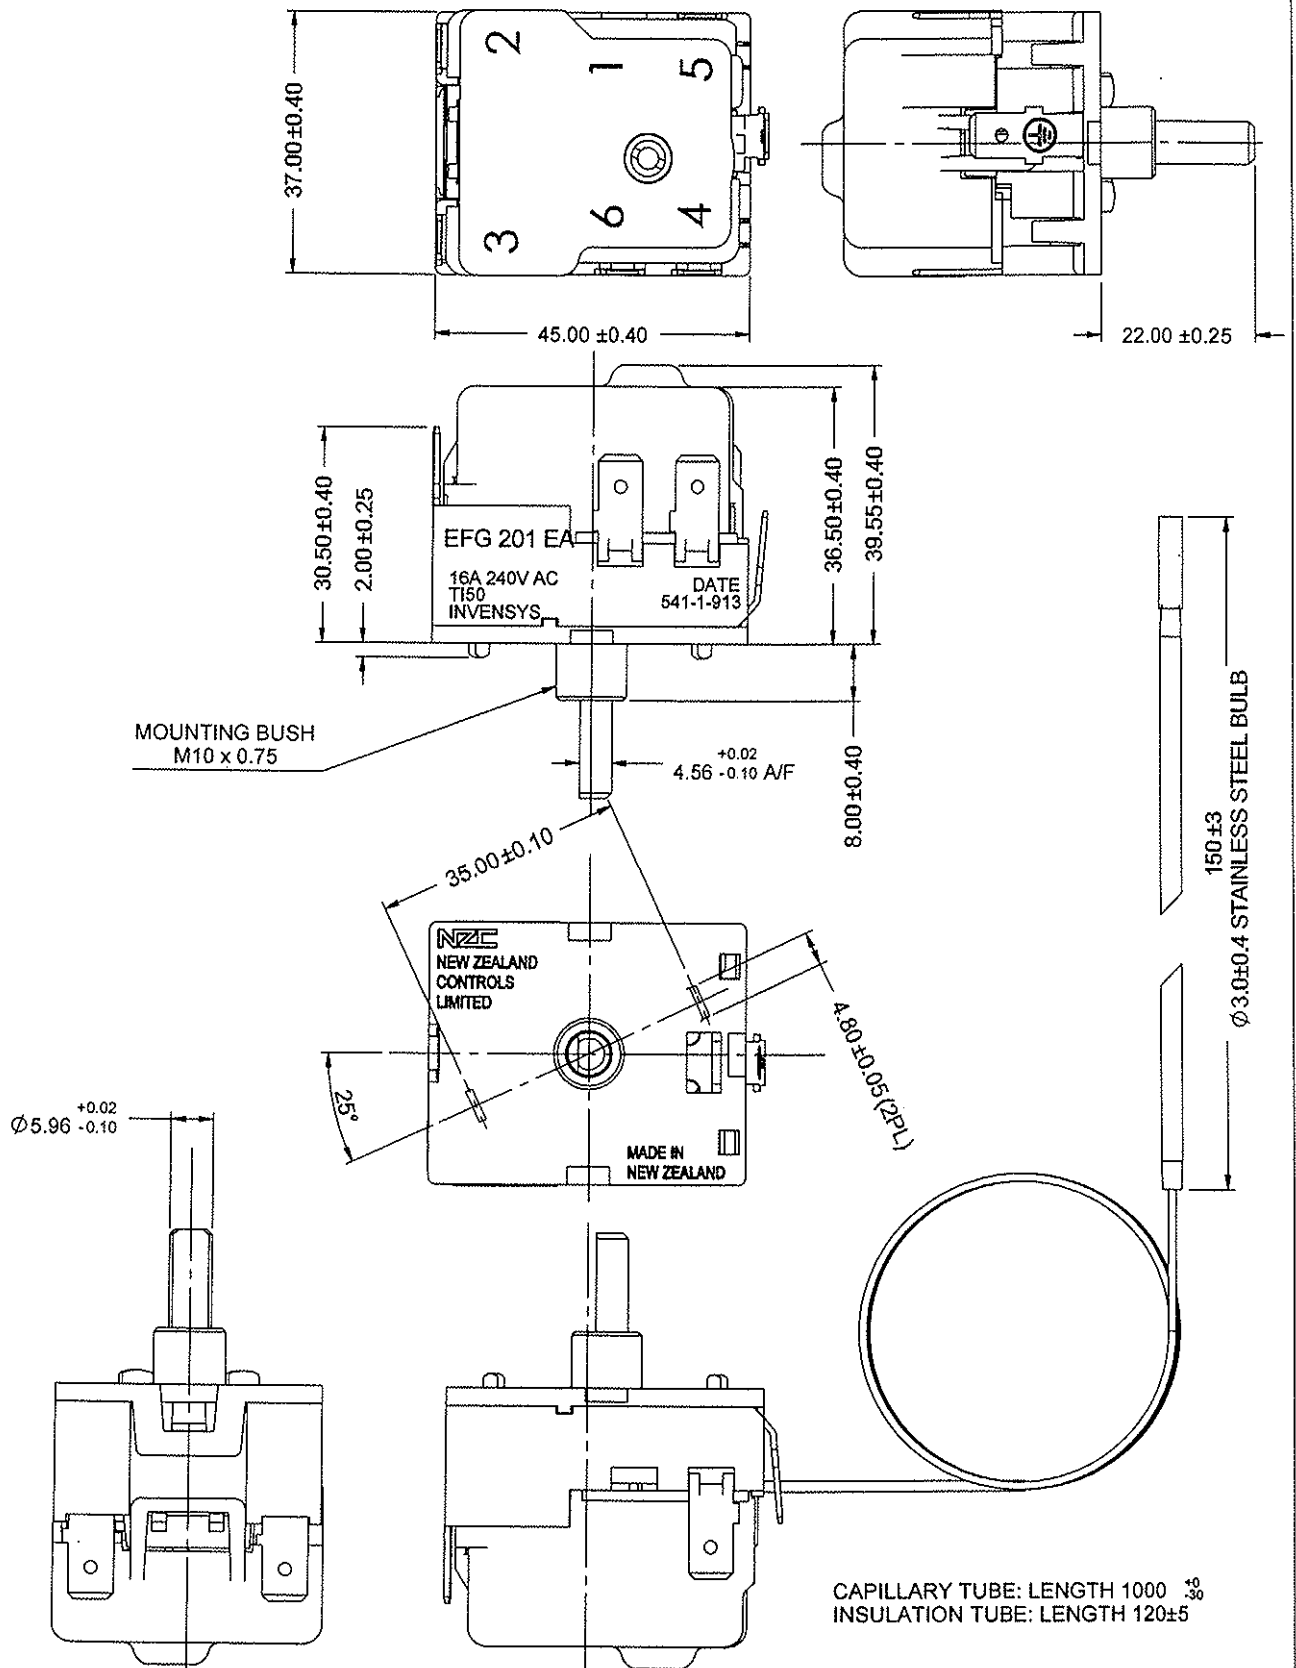

### WIRING DIAGRAM

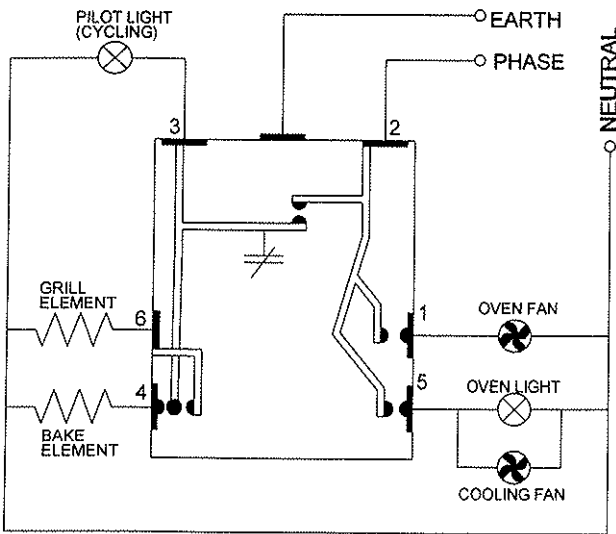


### NOTES



- 1) CURRENT RATINGS:
  - TERMINAL SWITCHING 2-5 0.22 AMP INDUCTIVE
  - TERMINAL SWITCHING 2-1 0.25 AMP INDUCTIVE
  - TERMINAL SWITCHING 2-3 16 AMP
  - TERMINAL SWITCHING 2-6 16 AMP
  - TERMINAL SWITCHING 2-4 16 AMP
  - \*IMPORTANT: TOTAL LOADING MUST NOT EXCEED 16 AMP.
- 2) AMBIENT TEMPERATURE OPERATION RANGE, -35°C TO 150°C (T150).  
MAXIMUM TEMPERATURE PERMITTED FOR CAPILLARY & BULB 350°C.
- 3) AMBIENT COMPENSATED
- 4) WEIGHT OF THERMOSTAT, APPROXIMATELY 87g.
- 5) DIAL SHAFT TORQUE 0.1-0.4 Nm  
MOUNTING NUT TORQUE MUST NOT EXCEED 0.65Nm.

### CALIBRATION & SETTINGS

(DIALSHAFT SHOWN IN THE OFF POSITION)

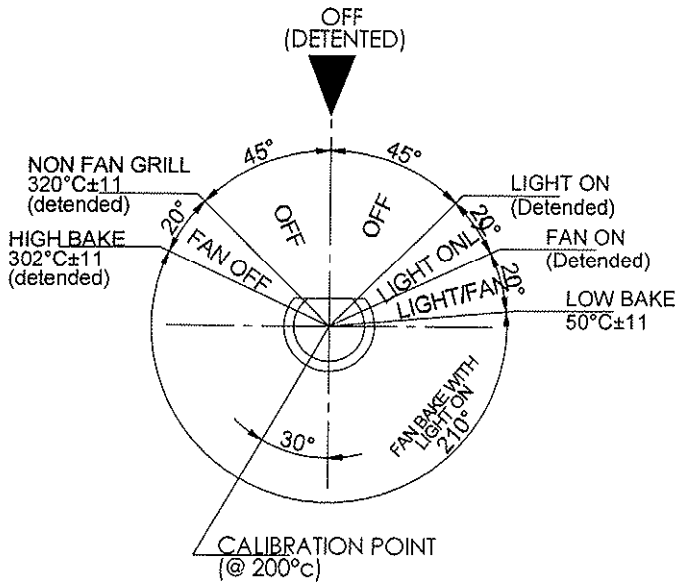

### TERMINAL DETAILS

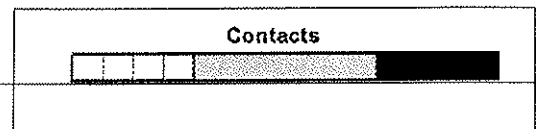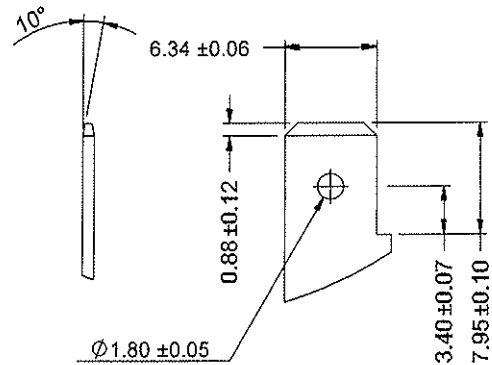

### SWITCHING SEQUENCE

