

**ORDERING INFORMATION**

CODE	PRODUCT CODE	DESCRIPTION	PRODUCT NUMBER	CARTON QTY
03136	EV-MERCURY-B	Mercury Emergency Exit Black	9336462031360	4

**OPERATIONAL INFORMATION**

GENERAL				BATTERY	
Voltage	220~240V	IP rating	IP20 (IP65 Weatherproof case)	Battery type	LiFePO4
Frequency	50Hz	Mounting type	Rod / surface / suspended or wall mounted	Battery code	01300
Ambient temp.	0 - 40°C	Duration	1/ 2/ 3/ 4 hours	Charger type	Smart charge
Class	2		(dependant on jumpers)	Charging time	16 hours
Wiring	Terminal block			Charging operation	Multi state
Viewing distance	24M				

**EMERGENCY PERFORMANCE**

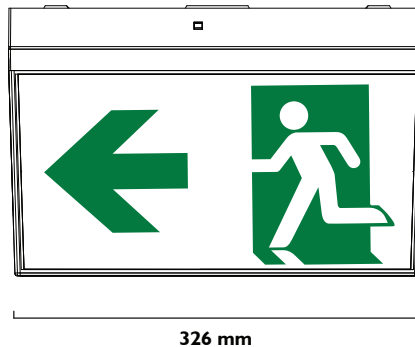
HOUR	1	2	3	4	8	CB
Lamp power (W)	1.05	1.05	1.05	0.53	-	1.05

**TOTAL POWER CONSUMPTION (TPC)**

MAINTAINED MODE		NON-MAINTAINED MODE	
Max.	Avg.	Max.	Avg.
4.5 W	2.5 W	3 W	0.25 W

**CONSTRUCTION AND DIMENSIONS**

BODY	PC
DIFFUSER	PC

**MERCURY BLACK**

**326 mm**

**211 mm**
**80 mm**

**NOTE:** For more information on the chemical resistance of our polycarbonate, please see the technical downloads page at [ektor.com.au](http://ektor.com.au)

**ACCESSORIES**

CODE	ORDER CODE	DESCRIPTION
01996	EV-MERCURY-DP-B	Mercury decal pack black
03922	EV-MERCURY-CASE-WP	Mercury weatherproof case
01211	EV-MERCURY-B-INV	Mercury inverter black
01300	EV-1000MAH-6.4V-LIFEP04	Battery, side by side 1000mAh 6.4V, 2 Cell LiFePO4
06118	ZC-WIFI	Zencontrol - Wi-Fi daughterboard compatible with Ektor devices
05304	ZC-ECM-DALI	Zencontrol - Easy Commissioning Module - DALI

Datasheet is subject to change without notice

 Last updated: **15. March 2017\_V1.4**