
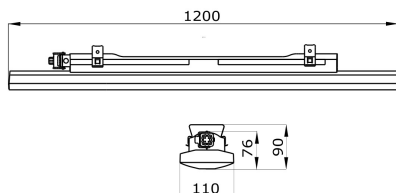


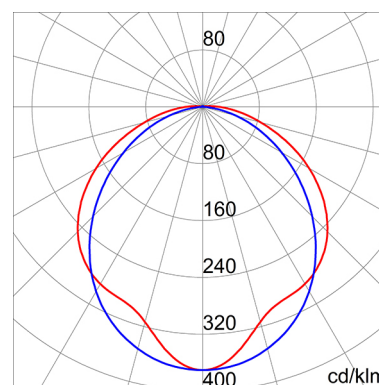

Luminaire with MID power LED (double or single die) equipped with steel sheet heat sink / reflector pre painted in white colour. Body in PC grey RAL7035. Diffuser in PC U.V. ray stabilized. Sealing deposited by automatic machine. Fixing system for wall, ceiling or suspension with harmonic steel springs, and wide adjustable fixing range. Quick connector integrated in the fixture for wires with 12.5mm max. diameter. Electronic LED driver with power factor correction.

Application	Internal	Series	SMART [3]
Type	Stand alone	IP degree	IP66/IP69
Shock resistance	IK08	Insulation class	II
Glow Wire Test	850 °C	Length	1200 mm
Device with reduced surface temperature	Complying	Shield type	Transparent
Operating temperature	-30 +50 °C	Weight (kg)	2
Voltage	220/240 V - 50/60 Hz - Stand alone	Lamp	LED
Driver type	EVG electronic reactor	System power	43 W
Type of light source	LED - Not replaceable	Colour temperature	4000 K (CRI 80)
LED number	63	Efficiency class of integrated LEDs	A + A++
Nominal flux (lm)	6.200	Lumen output (lm)	5.180
LED Life time (L70B50)	80.000 h	Warranty	5 years
Electrocod	2434		

DIMENSIONAL**PHOTOMETRIC DISTRIBUTION****TECHNICAL SYMBOLOGY**

IP66/IP69



IK08



850 °C

**STANDARDS/APPROVALS**