





Luminaire with MID power LED (double or single die) equipped with steel sheet heat sink / reflector pre painted in white colour. Body in PC grey RAL7035. Diffuser in PC U.V. ray stabilized. Sealing deposited by automatic machine. Fixing system for wall, ceiling or suspension with harmonic steel springs, and wide adjustable fixing range. Quick connector integrated in the fixture for wires with 12.5mm max. diameter. Electronic LED driver with power factor correction.

<b>Application</b>	Internal	<b>Series</b>	SMART [3]
<b>Type</b>	Stand alone	<b>IP degree</b>	IP66/IP69
<b>Shock resistance</b>	IK08	<b>Insulation class</b>	II
<b>Glow Wire Test</b>	850 °C	<b>Length</b>	1600 mm
<b>Device with reduced surface temperature</b>	Complying	<b>Shield type</b>	Transparent
<b>Operating temperature</b>	-30 +50 °C	<b>Weight (kg)</b>	2,5
<b>Voltage</b>	220/240 V - 50/60 Hz - Stand alone	<b>Lamp</b>	LED
<b>Driver type</b>	EVG electronic reactor	<b>System power</b>	53 W
<b>Type of light source</b>	LED - Not replaceable	<b>Colour temperature</b>	4000 K (CRI 80)
<b>LED number</b>	84	<b>Efficiency class of integrated LEDs</b>	A + A++
<b>Nominal flux (lm)</b>	8.290	<b>Lumen output (lm)</b>	6.900
<b>LED Life time (L70B50)</b>	80.000 h	<b>Warranty</b>	5 years
<b>Electrocod</b>	2434		

**DIMENSIONAL**

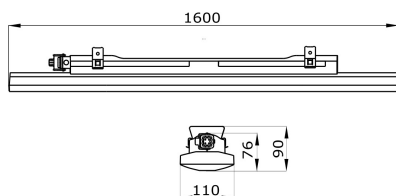

**PHOTOMETRIC DISTRIBUTION**

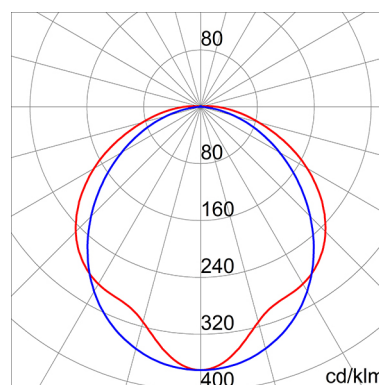

**TECHNICAL SYMBOLOGY**



IP66/IP69



IK08



850 °C



**STANDARDS/APPROVALS**

