

Zip

The trusted name in boiling water appliances



Zip

The Zip Boiling Water Unit provides the amount of boiling water you require quickly. This makes it ideal for clubs, factories, anywhere boiling water is required - only some of the time.

easy operation

Simply fill the unit with water and switch on the powerful 2.4kW element. The unit quickly boils the water and automatically switches off.

modern styling

Compact and modern, the Zip Boiling Water Unit is finished in white powder coated steel to suit any decor, and is very easy to keep clean.

efficient and versatile

The Zip Boiling Water Unit is a modern efficient way to provide boiling water. The internal tank is made of copper and the unit with almost no moving parts, requires very little maintenance. Polystyrene foam insulation surrounds the tank ensuring minimum heat loss and maximum efficiency. Available in a range of sizes, the Zip will cater for all your boiling hot water requirements. The "after match cuppa" has never been easier.

plumb up, plug in and pour

Mounted above or near a sink, the Zip Boiling Water Unit connects directly to your cold water supply via a tap.

Model No.	83204514	83207014	83215014	83223014	83235014
Delivery Capacity	4.5L	7.0L	15L	23L	34L
Dimension A mm	515	615	615	615	615
Dimension B mm	180	180	180	235	325
Weight Empty	9 kg	10 kg	15 kg	17 kg	20 kg
Weight Full	16 kg	20 kg	35 kg	45 kg	62 kg
Element Wattage	2400	2400	2400	2400	2400
Approximate Heat Up Times From Cold (18 degrees Celsius)					
Maximum Level	16 mins	23 mins	46 mins	67 mins	102 mins
Minimum level	6 mins	6 mins	14 mins	24 mins	28 mins

Rheem New Zealand Limited
 Free Phone 0800 657 336
 Telephone (09) 829 0200
 Free Fax 0800 657 337
 PO Box 19011, Avondale, Auckland
 New Zealand.

www.rheemnz.co.nz



Technical Information

Product:

The Zip Boiling Water Unit is a manually filled and switched appliance. The unit is filled via an appropriate valve until the required level is reached as viewed in the gauge glass. To boil the water, simply press the start switch. The unit will switch off automatically once the water has boiled.

Capacity:

4.5, 7.0, 15, 23, 34 litre models.

Electrical:

220V-240V ac 50HZ. Element rating 2.4kW. The heater comes fitted with a 3 pin plug or can be permanently wired in. An isolating switch must be used. Electrical installation must be in accordance with electrical wiring regulations.

Internal Tank:

Copper, fully enclosed within the unit.

Outer Jacket:

Powder coated steel. The unit is not weather proofed and external installations must be protected from the weather.

Insulation:

Polystyrene foam on all sides of the tank.

Hot water Outlet:


Situated at the front of the unit. The tap can be left open for continuous pouring or held open for intermittent use only.

Cold Water Inlet:

The inlet connection for the cold water supply is 15mm (1/2" BSP male).

Warranty:

The Zip Manual Boiling Water Unit Warranty and Customer Protection plan covers all defects in materials, components and workmanship for twelve months from the date of installation. The Zip Warranty also provides protection against cylinder leakage for a further four years. If during this period the inner tank fails, a replacement will be provided free of charge. Labour costs will be to the owners account.

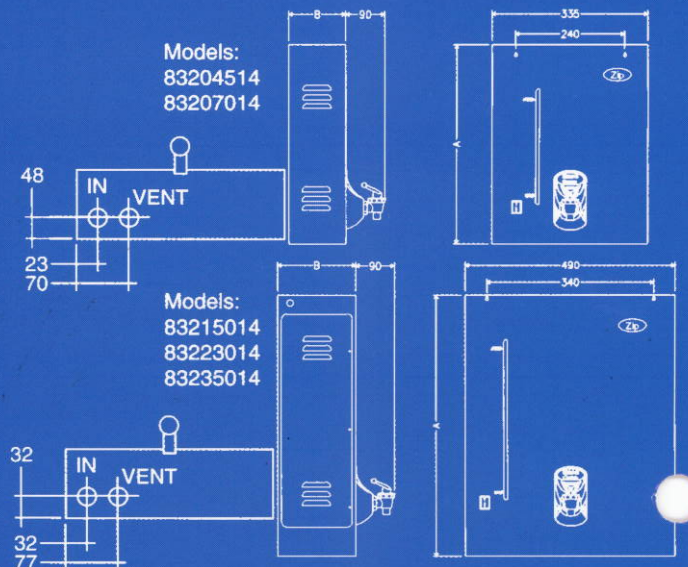

All information is current at the time of publication, June 2002, but may change without notice.